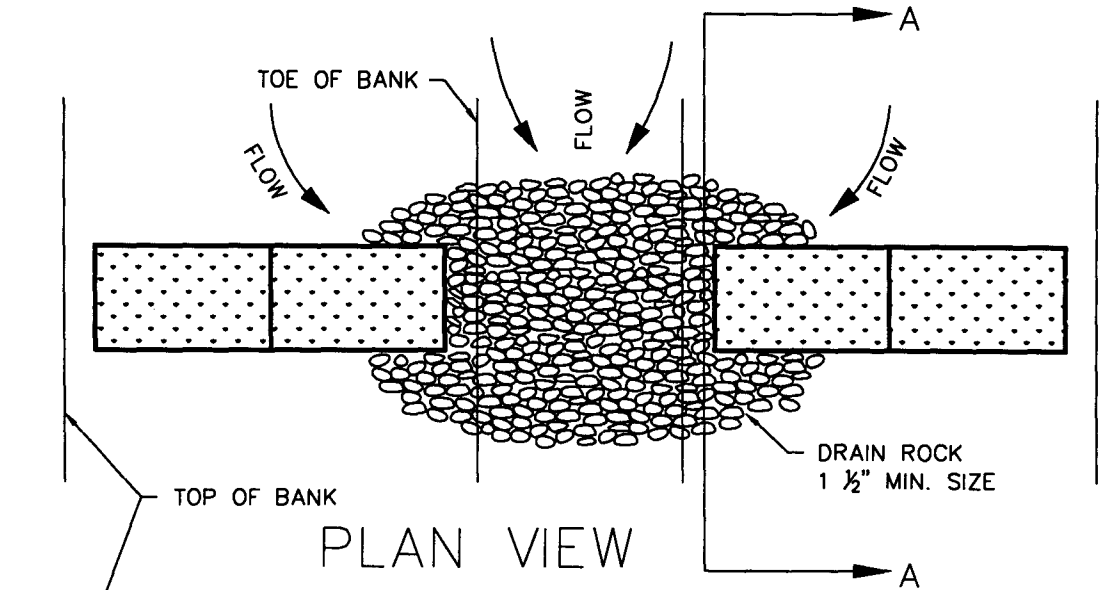

PLAN VIEW

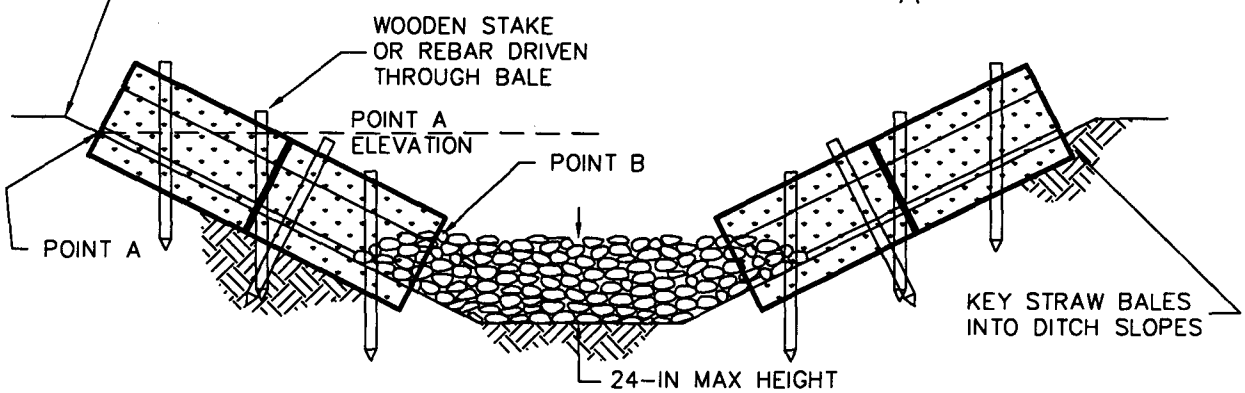

FRONT VIEW

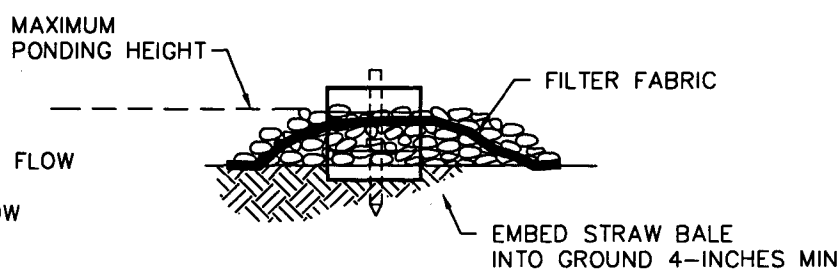

SECTION A – A

NOTES :

1. PLACE BALES PERPENDICULAR TO FLOW
2. BALES MUST BE PLACED IN A ROW WITH ENDS TIGHTLY ABUTTING
3. POINT A MUST BE HIGHER THAN POINT B
4. SPILLWAY HEIGHT MAY NOT EXCEED 24"

City of Bellevue

NO SCALE

TITLE

SEMI-PERVIOUS CHECK DAM

REV. DATE 10/2000

NO. EC-13