


NOTES

1. GRADE TRAIL SIDE SLOPES WITH TOPSOIL BACKFILL AT A 3:1 SLOPE. GRADING SHALL BE DONE SO THAT ACCUMULATION OF RUN-OFF DOES NOT COLLECT AT BOTTOM OF THE SIDE SLOPE. COMPACT AS REQUIRED BY THE ENGINEER.

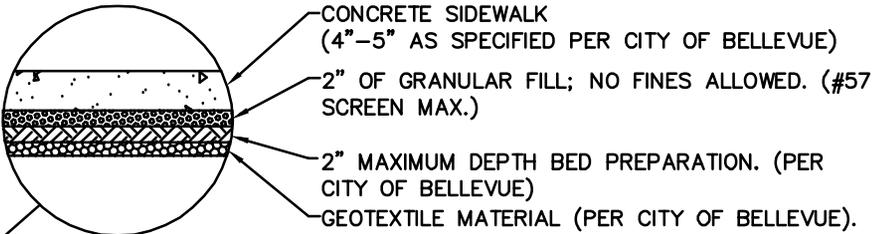

CRITICAL TREE (AS SPECIFIED BY CITY OF BELLEVUE)

SEE NOTE 1 (TYP 2 PLACES)

CONCRETE SIDEWALK (4"–5" AS SPECIFIED PER CITY OF BELLEVUE)  
 2" OF GRANULAR FILL; NO FINES ALLOWED. (#57 SCREEN MAX.)  
 2" MAXIMUM DEPTH BED PREPARATION. (PER CITY OF BELLEVUE)  
 GEOTEXTILE MATERIAL (PER CITY OF BELLEVUE).

ORIGINAL GRADE

CRITICAL ROOT ZONE



CRITICAL ROOT ZONE BENEATH CONCRETE AND ASPHALT WALKWAY

DRAWING NUMBER	DEV-16
SCALE	NONE
REVISION DATE	12/05
DEPARTMENT	TRANS