


NOTES

1. TEXT AND SYMBOLS ON BOLLARD SIGNS SHALL BE SPECIFIED BY CITY STAFF AND ARE SUBJECT TO REVIEW AND APPROVAL BY THE ENGINEER.
2. ALL SYMBOLS, CITY OF BELLEVUE LOGO, AND TEXT SHALL BE PAINTED OPAQUE WHITE UNLESS SPECIFIED OTHERWISE. USE HELVETICA FONT WITH 1/2" CAPS. TRANSITION STRAIGHT EDGE OF SIGN WITH 1-1/2" RADIUS TO A 10" RADIUS LOCATED AT THE TOP OF THE BOLLARD SIGN.
3. SIGN PLATES SHALL BE 1/8" THICK ALUMINUM LETTERED AND PAINTED AS SPECIFIED BY THE CITY. TIGER DRYLAC SERIES 49 SMOOTH, GLOSSY POLYESTER SYSTEM, POWDER COAT WITH RAC 5018 (BLUE) OR PERFORMANCE EQUIVALENT AND COLOR MATCH. ROUT WOOD 1/4" DEEP IN SHAPE OF EACH SIGN PLATE.
4. TRAIL NAMES AND ARROWS SHALL BE WHITE, WEATHER RESISTANT, PRESSURE SENSITIVE VINYL. USE 3M SCHOTCHAL #3470 OR EQUIVALENT. USE HELVETICA FONT WITH 3/4" HIGH CAPITAL LETTERS.
5. MOUNT SIGNS TO TWO SIDES OF BOLLARD FACING TRAVEL DIRECTION. USE 5 3/4" x 1/8" STAINLESS STEEL ALLEN HEAD WOOD SCREWS AND WASHERS. PAINT TO MATCH SIGN FACE.
6. BOLLARD SHALL BE 6' (LONG) x 8" (WIDE) x 8" (THICK) AND MADE FROM PRESSURE TREATED LUMBER TO WITHSTAND RAIN. SET POST 2' DEEP BELOW GRADE. 1" CONCRETE CHAMFER ALL SIDES ABOVE GRADE.
7. A HIGH INTENSITY DELINEATOR SHOULD BE ATTACHED TO ALL BOLLARDS THAT ARE LOCATED WITHIN THE CITY OF BELLEVUE BICYCLE TRANSPORTATION SYSTEM (PER THE BELLEVUE PEDESTRIAN AND BICYCLE TRANSPORTATION PLAN) OR AS SPECIFIED BY THE ENGINEER. USE 4" x 8" ZUMAR OR EQUIVALENT; WHITE COLOR ONLY. INSTALL ON ALL FOUR SIDES OR ALL SIDES WHICH ARE VISIBLE FROM PATH OR TO THE BICYCLIST. FASTEN WITH STAINLESS STEEL LAG SCREWS.
8. INSTALL BASE COURSE OF 3/4" MINUS CRUSHED ROCK, 4" THICK BENEATH BOLLARD CONCRETE FOOTING AS SHOWN.
9. BOLLARDS LOCATED ALONG THE MOUNTAINS TO SOUND GREENWAY CORRIDOR SHOULD USE THE ALTERNATIVE MOUNTAINS TO SOUND PLATE.

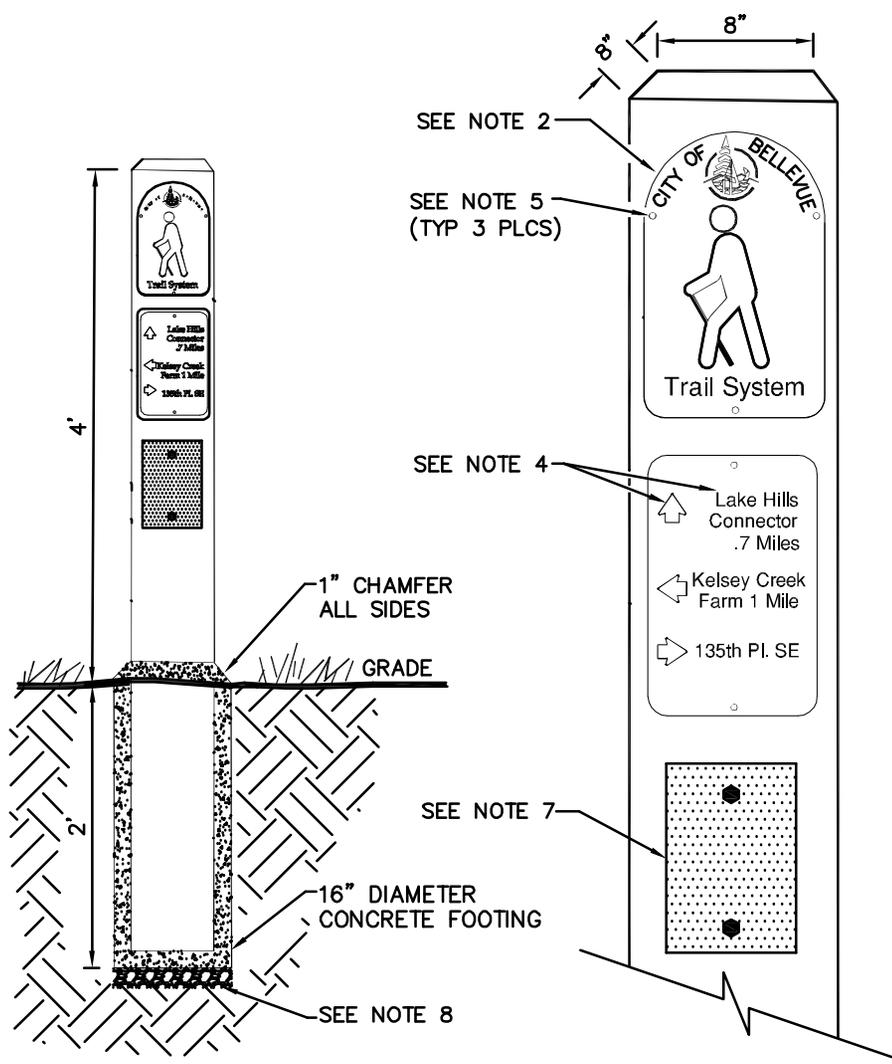

DIRECTIONAL BOLLARD

DRAWING NUMBER	DEV-21
SCALE	NONE
REVISION DATE	6/08
DEPARTMENT	TRANS