NOTES:

1. MATERIAL SHALL BE THERMOPLASTIC, HOT APPLIED OR HEAT FUSED PREFORMED (90 MIL. MIN.), UNLESS OTHERWISE APPROVED BY THE ENGINEER.
2. GAP WIDTH MAY BE ADJUSTED BETWEEN 12" AND 60" TO AVOID WHEEL PATHS.

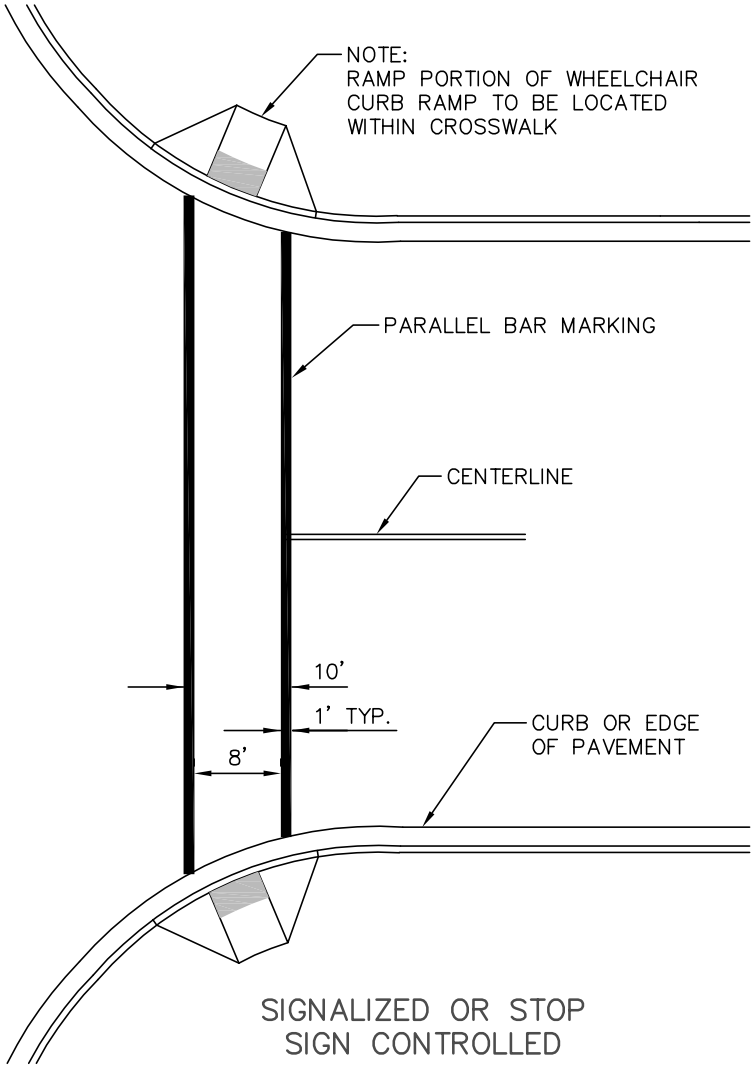

SIGNALIZED OR STOP
SIGN CONTROLLED

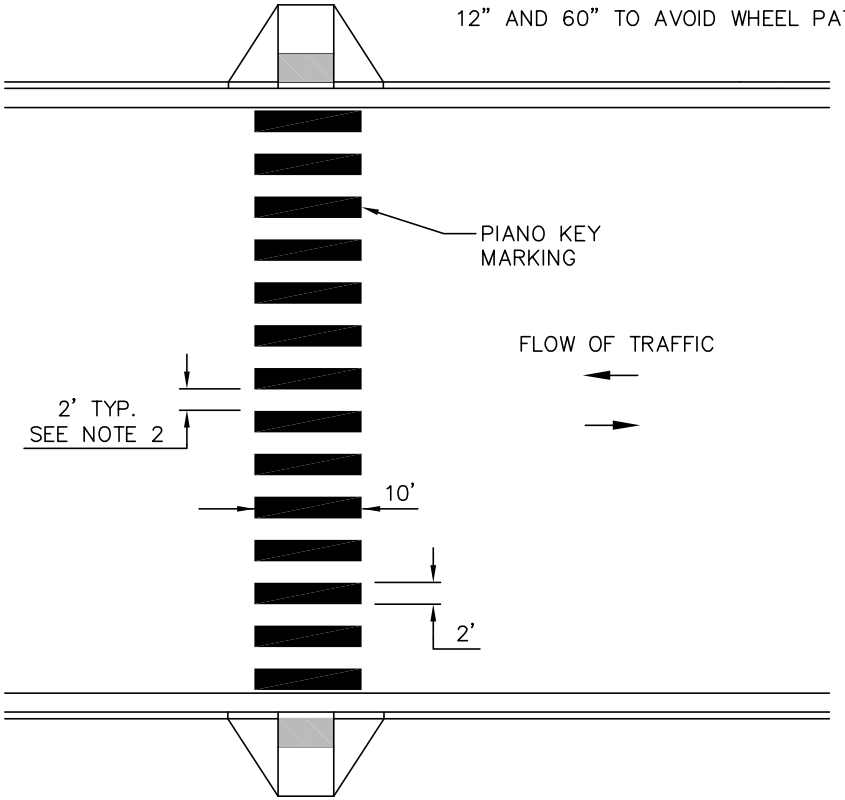

UNCONTROLLED OR YIELD
SIGN CONTROLLED

City of Bellevue

CROSSWALK MARKINGS

DRAWING NUMBER	TE-7
SCALE	NONE
REVISION DATE	2/06
DEPARTMENT	TRANS