
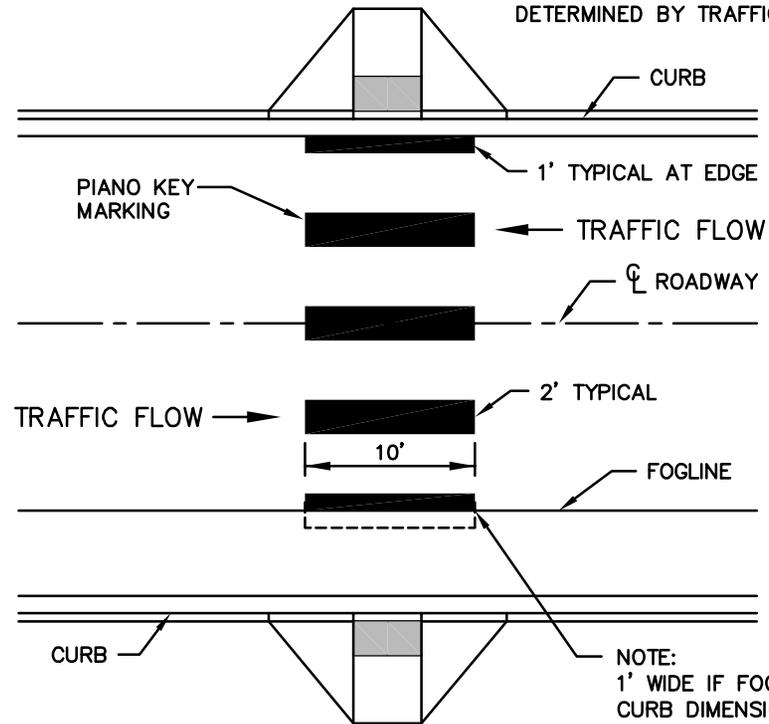


NOTES:

1. MATERIAL SHALL BE THERMOPLASTIC, HOT APPLIED OR HEAT FUSED PREFORMED (90 MIL. MIN.), UNLESS OTHERWISE APPROVED BY THE ENGINEER.
2. GAP WIDTH SHALL BE 2' MINIMUM.
3. CROSSWALK MARKING STYLE TO BE DETERMINED BY TRAFFIC ENGINEERING.

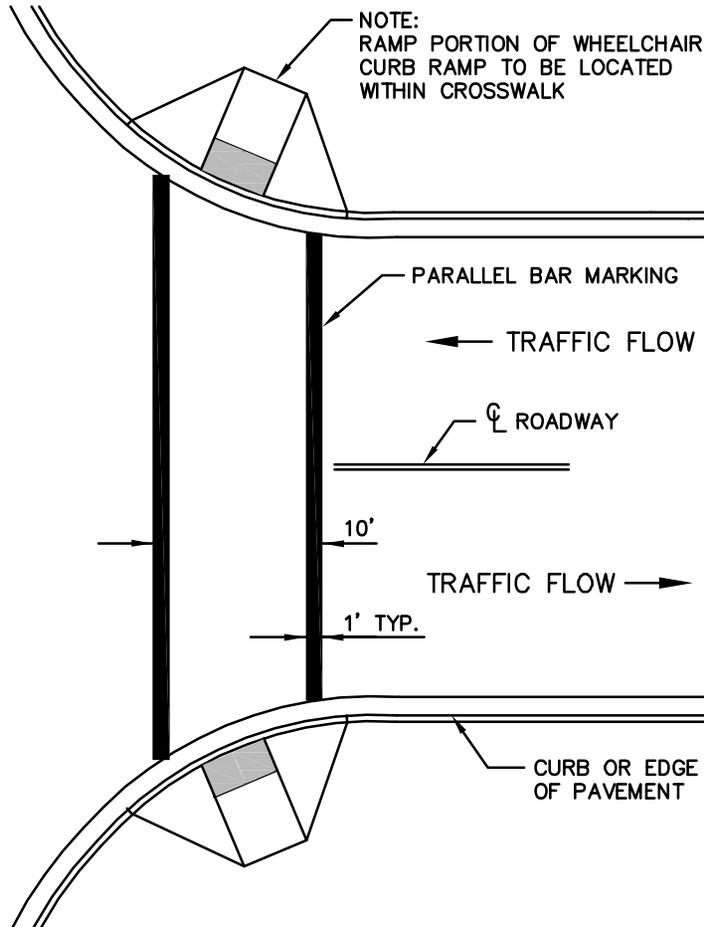

CROSSWALK MARKINGS

| | |
|----------------|-------|
| DRAWING NUMBER | TE-7A |
| SCALE | NONE |
| REVISION DATE | 01/14 |
| DEPARTMENT | TRANS |