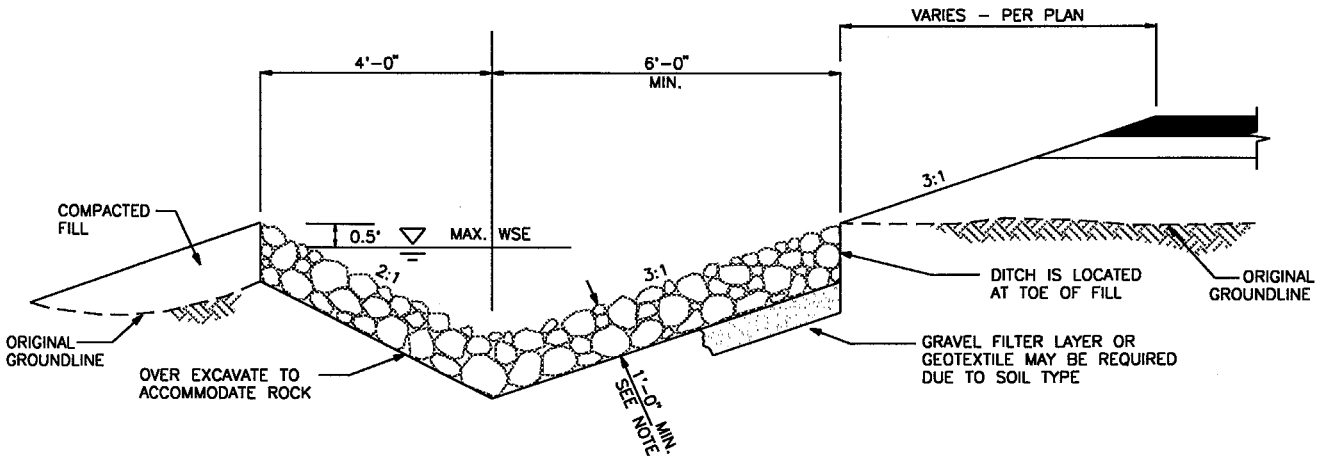

ROCK–LINED SHOULDER DITCH
IN FILL SECTION

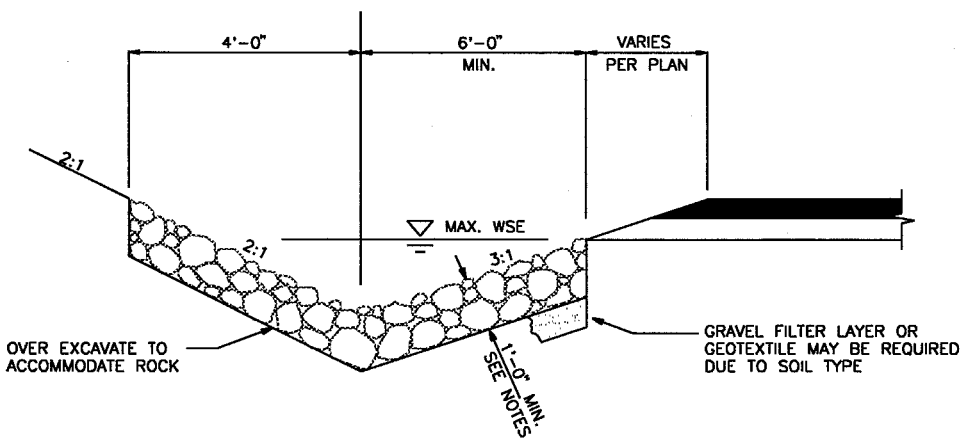

ROCK–LINED SHOULDER DITCH
IN CUT SECTION

NOTES:

1. ROCK LINED DITCHES TO BE USED WHEN FLOW VELOCITIES EXCEED 4 FPS.
2. ROCK SIZE AND DEPTH DEPENDENT ON FLOW VELOCITY. MINIMUM ROCK SIZE 2"–4" QUARRY SPALLS.

City of Bellevue SURFACE WATER UTILITY

TITLE

ROCK–LINED DITCHES

MARCH, 1996 NO SCALE

NO. D–35