


PRECAST CONCRETE TOP SLAB FOR 84" CATCH BASIN (100" DIAMETER).

OFFSET ACCESS OPENING AS SHOWN. LOCATE OVER ACCESS LADDER.

PLACE CEMENT MORTAR SEAL BETWEEN TOP SLAB AND CORRUGATED MANHOLE.

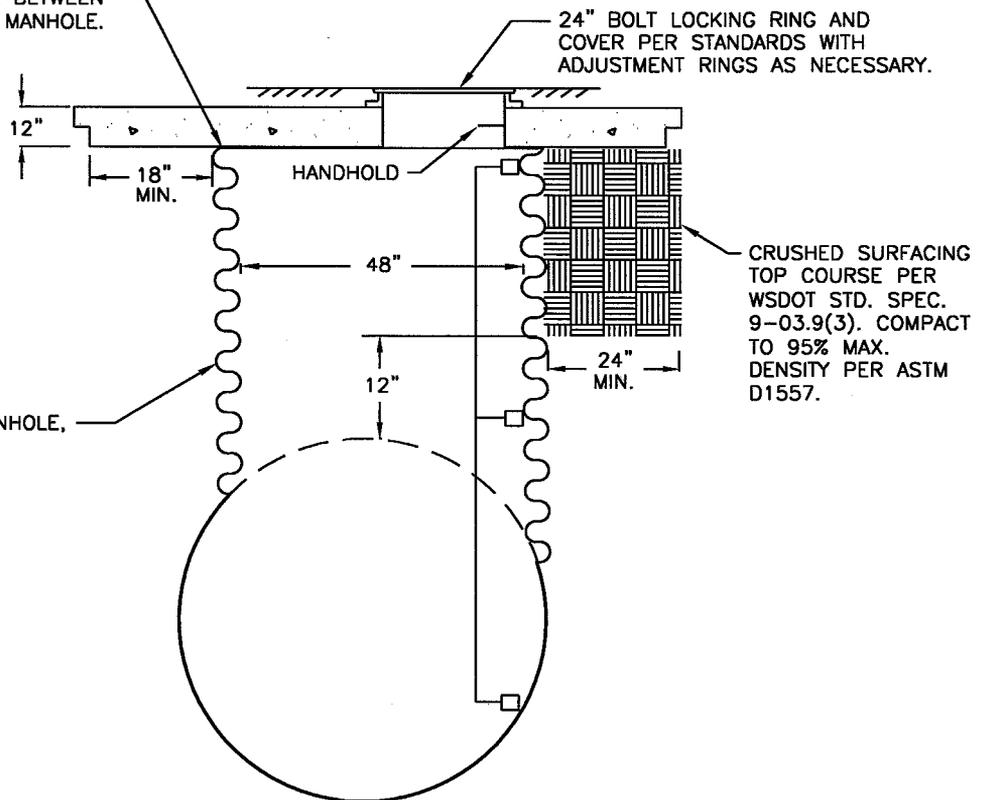

24" BOLT LOCKING RING AND COVER PER STANDARDS WITH ADJUSTMENT RINGS AS NECESSARY.

CRUSHED SURFACING TOP COURSE PER WSDOT STD. SPEC. 9-03.9(3). COMPACT TO 95% MAX. DENSITY PER ASTM D1557.

CORRUGATED METAL MANHOLE, PER STANDARD DETAIL.

ECCENTRIC SECTION

NOTE:

TOP SLAB SHALL BE RATED FOR H-20 LOADING.



City of Bellevue

SURFACE WATER UTILITY

TITLE

TRAFFIC BEARING ACCESS FOR CORRUGATED METAL MANHOLE

JULY, 1998

NO SCALE

NO. D-51